



Waveguide S-band Isolator 2.4~2.5 GHz

ADI245WR340-3K


Features

- Low insertion loss
- Robust design for shock and vibration
- RoHS Compliant

Electrical Characteristics

Parameter	Units	Specifications
Frequency	GHz	2.4~2.5
Insertion Loss	dB Max.	0.3
Isolation	dB Min.	20
Return Loss	dB Min.	19
Water Flow	-	Min. 2 l/min, max. 4 bar inlet pressure, +10~50 ambient (max. 40°C water inlet)
Power (FWD/REV)	Max.	3kW CW
Coupling	dB	-56±1.0
Waveguide Package	-	WR340
Dimensions	Mm	180 x 273 x 95.3

Mechanical Dimensions

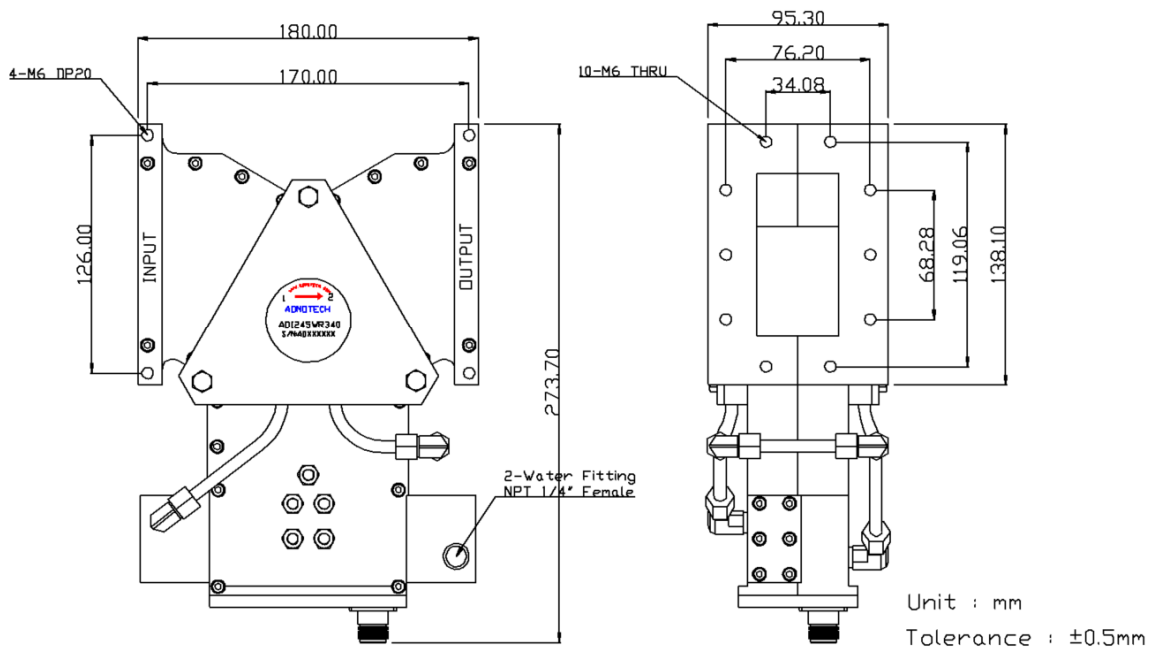

If you do not find appropriate frequency range, please contact with sales@admotech.com

