

**ADMOTEC**

Advanced Mobile Technology

1320,Gwanpyoung-dong,Yoosung-Gu,Taejon,305-509, Korea

Tel :+82-42-936-1353 Fax :+82-42-936-1350

DROP-IN ISOLATOR 3000 ~ 3400 MHz

ADI320CET(400)

Features

- 21dB typical Isolation, 0.25dB typical Insertion Loss at room temperature.
- Custom products available with alternate configurations such as attenuators, high power terminations, reverse circulation etc.
- Designed for Wireless Telecommunications Systems.
- RoHS Compliant

Options


The customers can choose as follows

- Direction : Clockwise(Default) or Counter Clockwise.
- T : Termination, A3 : -30dB Attenuator for detection, A2 : -20dB Attenuator for detection

Electrical Characteristics

| Parameter | Units | Specifications |
|------------------------|---------|--------------------------|
| Frequency | MHz | 3000 ~ 3400 |
| Insertion Loss | dB Max. | 0.25dB(room) 0.30dB(Max) |
| Isolation | dB Min. | 21.0dB(room) 19.0dB(Max) |
| VSWR | Max. | 1.25 : 1 |
| Temperature | °C | - 30 ~+85 |
| REV Power | W Max. | 100/150 |
| Input/Output Impedance | Ω | 50 |

Mechanical Dimension

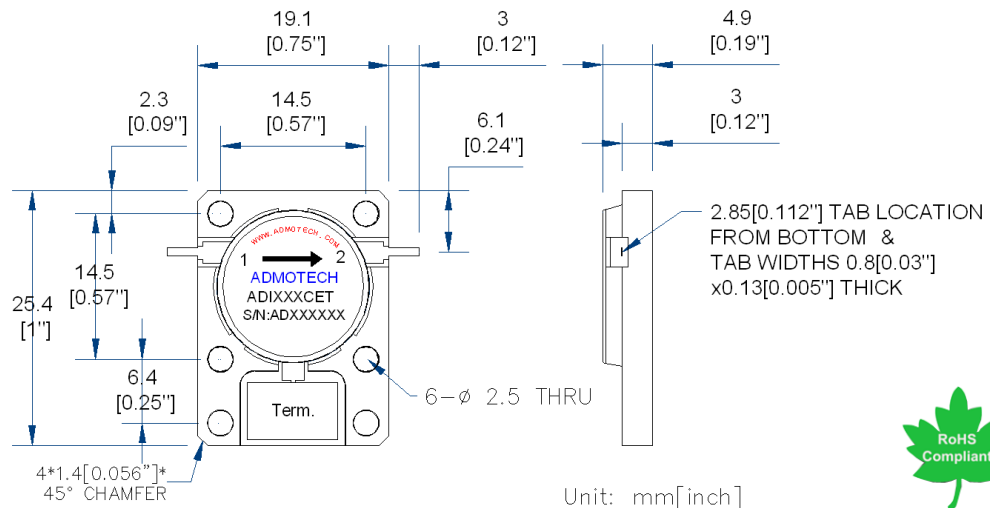

Package Size : CE

Option Type : T

Direction:Clockwise Default

If you do not find appropriate frequency range, Please contact with sales@admotech.com