



Features


- Ceramic Band Pass Filter (657.5 MHz ~ 682.5 MHz)
- Typical 2.5 dB Insertion Loss
- CW 1W Power handling



Specifications

Parameter	Specifications	Remarks
Frequency Range	657.5 ~ 682.5 MHz	BW : 25 MHz
Center Frequency	670 MHz	
Insertion Loss (Max.)	3.5 dB @ Center Frequency	
Pass Band Ripple (Max.)	0.5 dB	
Return Loss (Min.)	15.0 dB	
Rejection (Min.)	48 dB @ DC ~ 615 MHz	
	50 dB @ 725 ~ 2,000 MHz	
In/ Out Impedance	50 Ω	
Handling Power (Max.)	CW 1 W	
Operation Temperature Range	-40 °C ~ +85 °C	

Outline drawing

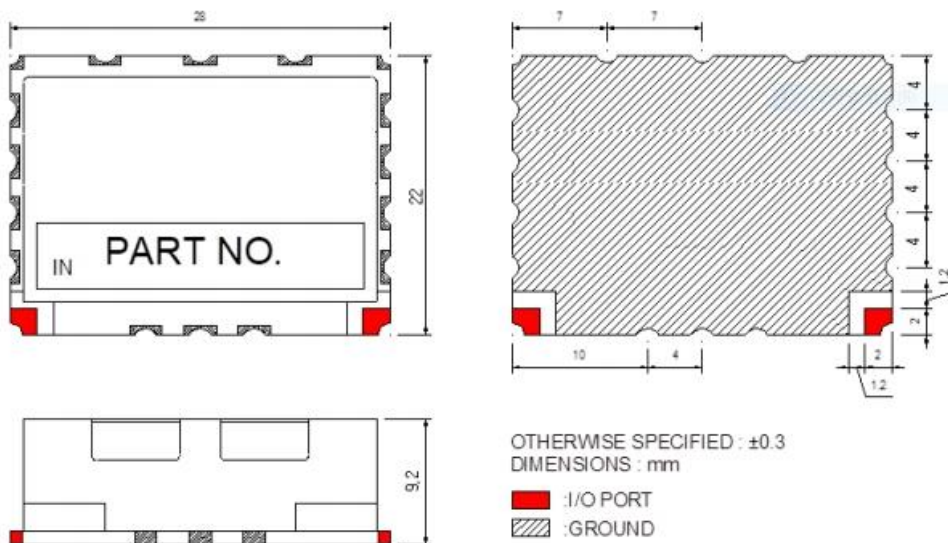

Units : mm, Tolerance : +/- 0.3 mm

Typical Response

