

Features


- ADBRF 5545-5555-A composed of BAND STOP FILTER
- Typical 4.4 dB Insertion Loss
- Typical 41.0 dB Stop Band Attenuation



Specifications

| Parameter | Specifications | Remarks |
|------------------------------|-----------------------------------|--------------------|
| Pass Band Frequency Range | DC ~ 5,545 MHz, 5,555 ~ 7,000 MHz | |
| Insertion Loss (Max.) | 5.0 dB @ Pass Band | |
| Stop Band Attenuation (Min.) | 40 dB @ 5,549 ~ 5,551 MHz | |
| Return Loss (Min.) | 10 dB @ Pass Band | |
| In/ Out Impedance | 50 Ω | |
| Max. Input Power | 10 W | |
| Operating Temp. | 10 ~ 55 °C | |
| Dimensions | 91.0 * 197.0 * 22.0 mm | Exclude Connectors |
| Connector | SMA (F) | |

Outline drawing

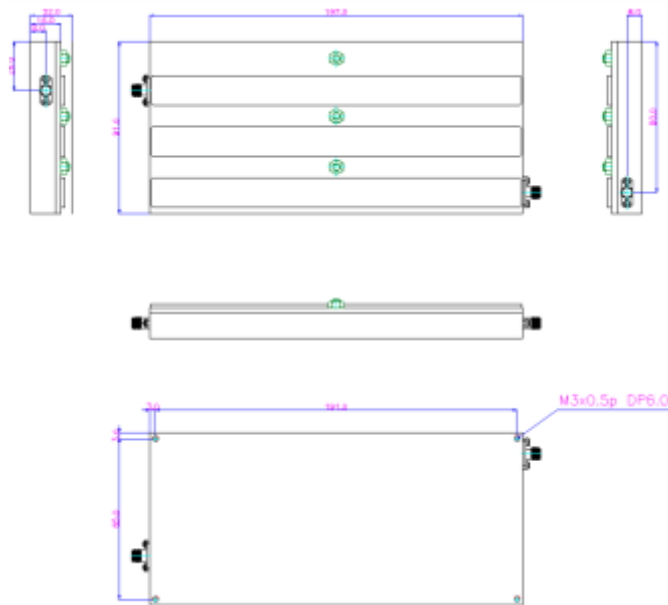

Units : mm, Tolerance : +/- 0.2 mm

Typical Response

