

Features


- ADLPF 962-1213A composed of Low Pass Filter
- Typical 0.2 dB Insertion Loss



Specifications

Parameter	Specifications	Remarks
Frequency Range	962 ~ 1,213 MHz	BW : 251 MHz
Center Frequency	1,087.5 MHz	
Insertion Loss (Max.)	0.3 dB	
Return Loss (Min.)	15.0 dB	
Rejection (Min.)	20.0 dB @ 1.6 GHz	
In/ Out Impedance	50 Ω	
Max Power	8kW (Worst RF Pulse : 12 us, Width : 0.5 us)	
Dimensions	112 * 28 * 23 mm	Excluding Connectors
Connector	N-type (Female)	

Outline drawing

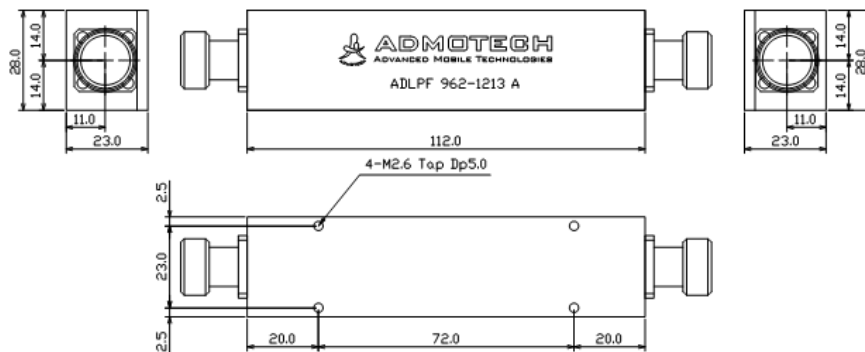

Typical Response

