



# Coaxial SMA Type Circulator

## 800 ~ 1000 MHz

# ADC090CSEH


### Features

- 17dB typical Isolation, 0.35dB typical Insertion Loss at room temperature.
- Custom products available with alternate configurations such as attenuators, high power terminations, reverse circulation etc.
- Designed for Wireless Telecommunications Systems.
- RoHS Compliant

### Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	800 ~ 1000
Insertion Loss	dB Max.	0.55
Isolation	dB Min.	15
VSWR	Max.	1.43 : 1
Temperature	°C	- 30 ~ +85
FDW./REV. Power	W Max.	150/100
Input/Output Impedance	Ω	50

### Mechanical Dimensions

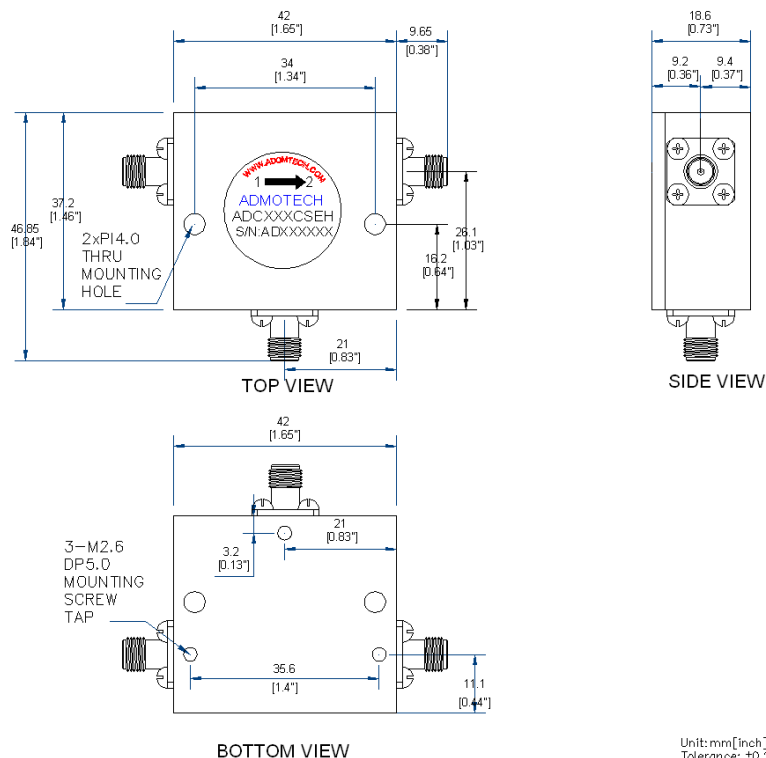

If you do not find appropriate frequency range, Please contact with [sales@admotech.com](mailto:sales@admotech.com)